

CC6571D LIQUID COOLED WALK BEHIND SAW

Cool Running, Fuel Efficient and
Reliable 71 HP Kubota® Diesel



Blade not included

14"-42" Blade Capacity

Diesel

Features & Benefits:

- Tier 4 Final liquid-cooled engine allows for a smoother running, longer lasting saw with higher productivity
- Easy to maneuver self propelled drive
- Strongest frame on the market
- Less rear weight for easy maneuvering and reduced operator fatigue
- Oil bath blade shaft comes standard
- One-hand sawing control and parking brake
- Fits through a 36" wide door frame (when guard is removed)
- Quick release blade shaft/flange and rear wheels
- Blade shaft tachometer-where it's needed-not at the engine, gives true blade speed

Specifications:

Blade shaft diameter:	2"
Arbor Size:	1" with drive pin
Blade shaft drive:	10 belt
Blade mounting:	Right or left
Blade raise & lower:	Electro-hydraulic pump
Transmission:	Eaton model 10
Drive speed:	0-200 feet/minute
Air filter:	4 stage
Fuel capacity:	9 gallons

Includes



Blade shaft tachometer, Hour meter, Frame lift, Telescoping front pointer, Parking brake, Cutting depth indicator, Quick disconnect blade flanges, Oil bath blade shaft



CC6571D DIESEL LIQUID COOLED WALK BEHIND SAW

Saw Model #	Engine/Motor Make	Speeds	Engine/Motor Power	Power Source	Blade Capacity	Part #	Cat #	Product Weight (lbs.)
CC6571D-14	Kubota®	Single	71 HP	Diesel	14"	5801160	55603	1,825
CC6571D-20	Kubota®	Single	71 HP	Diesel	20"	5801161	55625	1,835
CC6571D-26	Kubota®	Single	71 HP	Diesel	26"	5801162	43504	1,848
CC6571D-30	Kubota®	Single	71 HP	Diesel	30"	5801163	54080	1,852
CC6571D-36	Kubota®	Single	71 HP	Diesel	36"	5801164	41741	1,855
CC6571D-42	Kubota®	Single	71 HP	Diesel	42"	5801165	55633	1,905
CC6571D-3-14	Kubota®	3-Speed (14"/26"/36")	71 HP	Diesel	14"	5801170	59044	1,815
CC6571D-3-20	Kubota®	3-Speed (20"/30"/42")	71 HP	Diesel	20"	5801171	55695	1,825
CC6571D-3-26	Kubota®	3-Speed (14"/26"/36")	71 HP	Diesel	26"	5801172	43503	1,835
CC6571D-3-30	Kubota®	3-Speed (20"/30"/42")	71 HP	Diesel	30"	5801173	55713	1,845
CC6571D-3-36	Kubota®	3-Speed (14"/26"/36")	71 HP	Diesel	36"	5801174	55728	1,850
CC6571D-3-42	Kubota®	3-Speed (20"/30"/42")	71 HP	Diesel	42"	5801175	55729	1,894

Horsepower and torque as rated by the engine manufacturer.

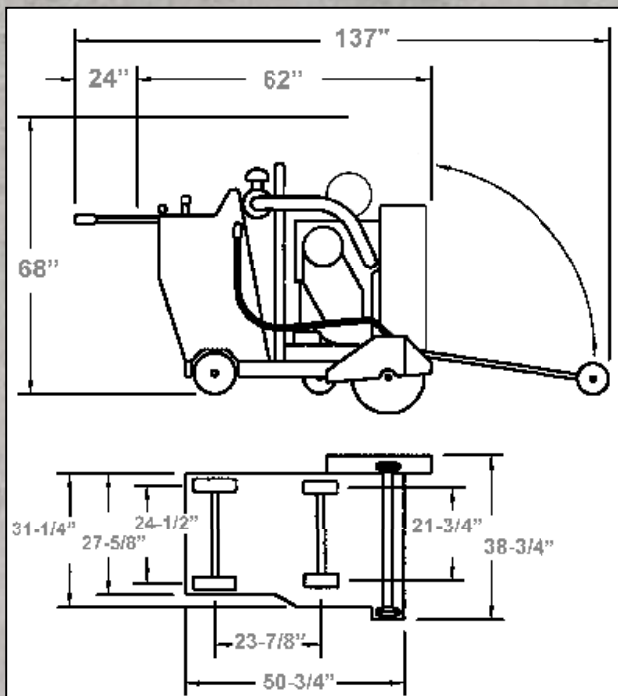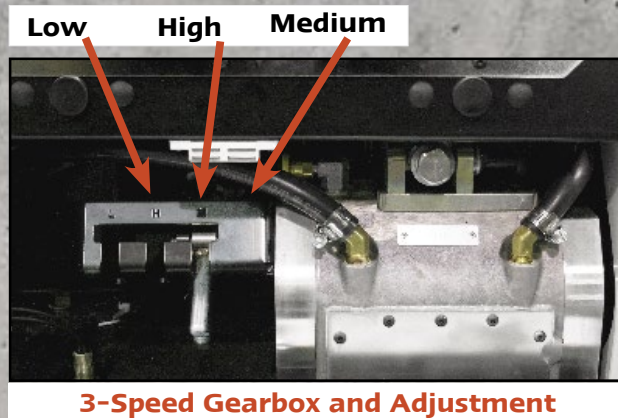

CC6571D OPTIONS

Description	Part #	Cat #
Water Safety Switch	6010522	67821
Water Pump (electric)	6011032	02506
Spot Light	6010112	02427
Lowering Speed Metering Valve	6010227	02480
Blade stacking kit-4-1/2" flange (for blades 1-1/2" apart)	6010630A	23186
Blade spacing kit-4-1/2" flange (for blades 2" apart)	6010631A	23187
Blade spacing kit-4-1/2" flange (for blades 4" apart)	6010632A	16558
14" Tapered Mount Blade Guard	6010950	20011
20" Tapered Mount Blade Guard	6010952	08213
26" Tapered Mount Blade Guard	6010954	19322
30" Tapered Mount Blade Guard	6010956	20456
36" Tapered Mount Blade Guard	6010958	13375
42" Tapered Mount Blade Guard	6010960	08216

CC6571D SINGLE SPEED RPM

Blade Size	Blade RPM	Max Cut Depth
14"	2,700	4-1/2"
20"	2,400	7-1/2"
26"	1,950	10-1/2"
30"	1,700	11-3/4"
36"	1,400	14-3/4"
42"	1,200	17-3/4"

CC6571D 3-SPEED RPM

Blade Size	Blade RPM	Gear Setting High, Med, Low	Max Cut Depth
14"	2,700	H	3-3/4"
20"	2,550	H	6-3/4"
26"	1,775	M	9-3/4"
30"	1,675	M	11-3/4"
36"	1,175	L	14-3/4"
42"	1,100	L	17-3/4"